




## N DO

## O a ebe e



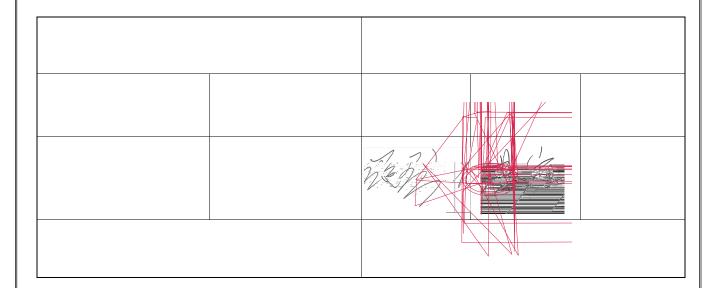



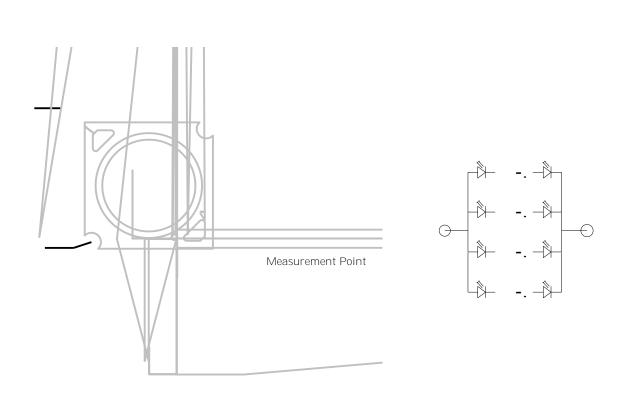

Notes for Table:

. D.C. Current : Tj = Ts + Rj-s x Pi



				_	
Φ					
•					
	±				
				_	
		_	_		

2700K 3000K

4000K

5000K

5700K

Notes for Table

\*


该产品通过瞬态 点亮,分光分色. 若使用不同电流,会引起色温及电压的变化

色坐标的测量误差允许在


+







Та	Ta=25°				

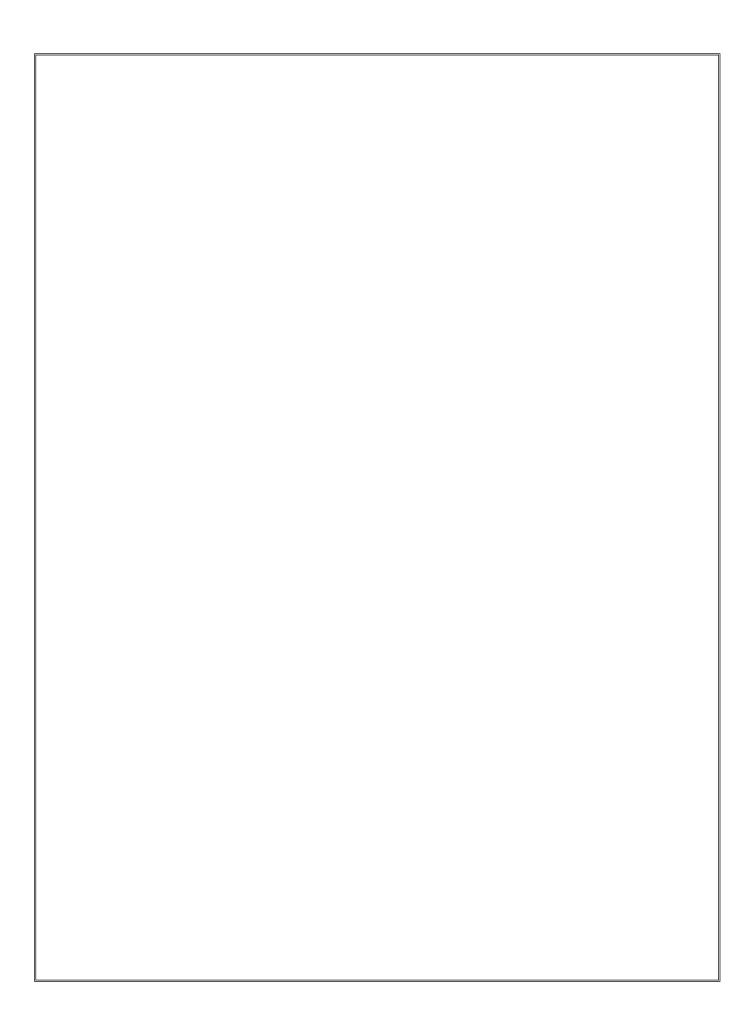



## Precaution for use (

1. Storage

P e e a(aa a ca ee b da aa HA 1 /, (a) e ad e e 82, HA d a a ede -24D b aecda ca Laa a a ad e eb c ee 6 -., 1 (,0D Abba e a ca b da a a e a a

30° C

120° C±5° C

2.Pda a e c a e

O aec ee 6Nab aece a a a b de HA Bbd aec(a)
aece a a a a/1, aece a I ad 1 a (badabe aec(
a ada a b a a a a a ea a a abaa a aec
Laa a ada aec(daae a a b a da aec b a ee
a d a a(be e d a e(a % ec ea ab e ))
ca da eea Bba a a a a ee (a c aadaHA ee (
a a da e a a be
ec a (a aa ad c e da ae ea e e a a

a da b a S dea e c da Da Oe % a a HA e be ecda a da a e c a aa b a E d da) a e (d cd a a a b a 1,, . . 350° C

/ = eOO e I a a



0 Pa	a	a				

